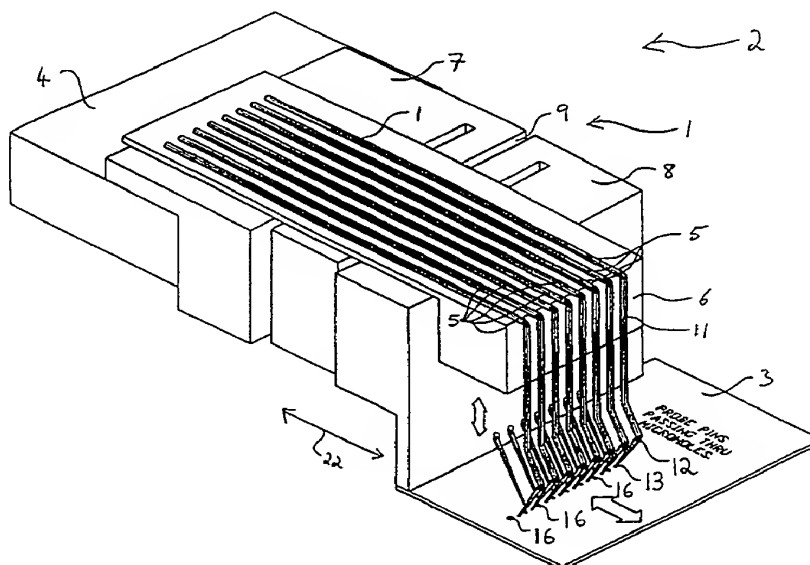


m.H

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G01R 31/28, 1/04, H01L 21/66	A1	(11) International Publication Number: WO 00/14558 (43) International Publication Date: 16 March 2000 (16.03.00)
(21) International Application Number: PCT/SG98/00068 (22) International Filing Date: 9 September 1998 (09.09.98) (71) Applicant (for all designated States except US): SPIRE TECHNOLOGIES PTE LTD. [SG/SG]; 21, Kallang Avenue #06-169/171, Singapore 339412 (SG). (72) Inventors; and (75) Inventors/Applicants (for US only): SAWHILL, Robert, Arthur, Jr. [US/SG]; 2 Hillview Way, Singapore 669173 (SG). SHAH, Paren, Indravadan [IN/SG]; 10 Rose Lane #01-01, Singapore 429076 (SG). (74) Agent: MCCALLUM, Graeme, David; Lloyd Wise, Tanjong Pagar, P.O. Box 636, Singapore 910816 (SG).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>

(54) Title: INTERFACE DEVICE BETWEEN TESTING EQUIPMENT AND INTEGRATED CIRCUIT**(57) Abstract**

An interface device (2) provides an interface between testing equipment and an integrated circuit to be tested. The interface device (2) includes a body member (7) and a movable member (8) mounted on the body member (7) for movement with respect to the body member (7). A number of elongate contact members (5) are mounted on the movable member (8) for movement with the movable member (8). Each contact member (5) includes a contact end (10), adapted to contact a bond pad of the integrated circuit to be tested, and a body portion (11). The central axis of the body portion (11) and the contact end (10) are substantially parallel to each other.

BEST AVAILABLE COPY

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

D/PR TS

INTERFACE DEVICE BETWEEN TESTING EQUIPMENT AND INTEGRATED CIRCUIT

The invention relates to an interface device for providing an interface between testing equipment and an integrated circuit to be tested using the testing equipment.

A probe card is used in semiconductor wafer fabrication and/or packaging facilities to test the integrity of every semiconductor chip produced. The process of testing involves testing equipment referred to as "probers" and an interface device which couples the testing equipment to the semiconductor chip to be tested. The interface device is commonly known as a "probe card". The probe card generally comprises a large number of probes, which take the form of pins and which are arranged on a printed circuit board or other supporting structure, in a pattern which is specific to the semiconductor chip to be tested.

Test signals are exchanged between the prober and the semiconductor chip via the probe card and in particular, the probes which contact the bond pads on the semiconductor chip to be tested. The quality of signals received by the prober from the chip is dependent on the quality of the probe card and the quality of contact between the probes and the bond pads on the chips.

Conventional probe cards incorporate a pin geometry in which the main body of the pin approaches the bond pads on the die

at an angle of approximately 7° to 20° from the horizontal, with the contacting tip of the probe angled relative to the main body of the pin at an angle of typically 103° to 108° to contact the bond pad of the dye. Hence, the force of contact between the pin and the bond pad is dependent on the section modulus of the probe pin. The contact force that can be applied to the bond pad reduces as the length of the pin increases. Hence, conventional probe card designs have a disadvantage that the more pads which exist towards the center of the dye or the needle array, the more difficult it is to exert the required force between the end of the pin and the bond pad to perform the electrical tests accurately, which is the primary cause of yield loss at the wafer sort stage.

This is a particular problem with new integrated circuits which are becoming denser and include structures which are smaller in size which makes the use of multi die probing inevitable. Due to this, conventional probe card design is becoming more complicated and difficult to manufacture which makes the probe cards more expensive to manufacture and to maintain a balanced contact force on all the bond pads simultaneously.

In accordance with the present invention, an interface device for providing an interface between testing equipment and an integrated circuit to be tested comprises a body member, a movable member mounted on the body member for movement with

respect to the body member and a number of elongate contact members vertical probes mounted on the movable member, for movement with the movable member; each elongate contact member comprising a contact end, adapted to contact a bond pad of an integrated circuit to be tested, and a body portion, the central axis of the body portion and the contact end being substantially parallel to each other.

The advantage of the invention is that, as the contact end is substantially parallel to the body portion of the contact member, it is possible to obtain better contact between the contact member and a bond pad on a chip to be tested.

Preferably, each contact member comprises a spring shaped portion located between the probe end and the body portion. Typically, the spring shaped portion comprises two portions at an angle to each other and to the body portion and the contact end. Preferably, one of the spring portions is longer than the other spring portion so that the central axis of the contact end is not coincident with the central axis of the body portion. Preferably, the spring portion coupled to the contact end is longer than the spring portion coupled to the body portion to permit immediately adjacent contact members to have their contact ends in line with each other and the body portions offset from each other. In other words, the contacting end and the vertical spring shaped body member are offset in the vertical axis. This feature has the advantage of permitting the contact members to be located

closer to each other while minimising the risk of the body portions contacting each other.

Preferably, the contact ends and the spring portions attached to the contact end are tapered towards the end of the contact end. This minimises the risk of the contact ends contacting each other in use.

Preferably, the interface device further comprises a printed circuit board to which the ends of the contact members opposite to the contact ends are coupled and the printed circuit board is adapted to permit the testing equipment to be coupled to the printed circuit board.

Preferably, the movable member is coupled to the body member by an elastically flexible member. Preferably, the body member, the elastically flexible member and the movable member are fabricated from a single piece of material, portions of the material being removed to form the elastically flexible member. Preferably, the material from which the body portion, elastically flexible member and the movable member is fabricated is a metal, such as steel, aluminium or titanium. Typically, the elastically flexible member may be in the form of an elastic beam which is generally "U" shaped.

Preferably, the movable member is coupled to the body member by a number of elastic flexible members. Typically, where

the body member is generally rectangular, the movable member is located within the body member and may be coupled to the body member by four elastic flexible members. Typically, the movable member defines an aperture at the center into which the contact members protrude. Typically, the aperture may be covered by a covering material through which the contact ends of the contact members protrude. Typically, the cover material may comprise a glass, such as borosilicate glass.

Typically, the interface device may further comprise an excitation device to move the movable member with respect to the body member. For example, the excitation device may be a piezo-electric device, a micro motor or an ultrasonic device. Typically, the movement of the movable member with respect to the body member may be in the order of 10 microns to 100 microns.

Preferably, the elongate contact member may be formed from metal wire with a diameter of 1 mil to 10 mil and is preferably in the region of 4 mil to 10 mil. Typically, the contact surface of the contact ends may have a diameter of approximately 0.5 mil to 5 mils and preferable 1 mil to 2.5 mils. The contact surface may be either planar or curved. Preferably, the contact members may be tungsten, beryllium copper, palladium, paliney or an alloy of two or more of these materials. Preferably, the angle between the spring shaped portions of the contact members is approximately 45° to 135° and is preferably in the region of 60° to 135° .

Preferably, the central axis of the contact end and the central axis of the body portion are separated by a distance which is approximately equal to 1.5 times the diameter of the body portion.

An example of an interface device in accordance with the invention will now be described with reference to the accompanying drawings, in which:-

Figure 1 is a schematic perspective view of an interface device showing the principle of operation;

Figure 2 is a side view of a portion of a contact pin for use in the interface device;

Figure 3 is a plan view of a body member and a movable member for use with an interface device;

Figure 4 is a side view of the body member and movable member shown in Figure 3;

Figure 5 is a plan view of a jig for forming the contact pin shown in Figure 2;

Figure 6 is a left hand side view of the jig shown in Figure 5;

Figure 7 is a front view of the jig shown in Figure 5;

Figure 8 is a front view of a bend former for use with the jig shown in Figures 5 to 7; and

Figure 9 is a right hand side view of the bend former shown in Figure 8.

Figure 1 shows a schematic view of a probe card 2. The probe

card 2 includes a flexure ring 1, a glass plate 3, a printed circuit board (PCB) 4 and a number of contact pins 5 mounted on a mounting member 6 attached to the flexure ring 1.

The flexure ring 1 comprises a main body member 7, a movable member 8 and an elastic beam 9 interconnecting the main body member 7 and the movable member 8. The elastic beam 9 is generally "U" shaped and is coupled at one end of the "U" shape to the movable member 8 and coupled at the other end of the "U" shape to the main body member 7. The main body member 7 is attached to the PCB 4 and the movable member 8 is attached to the mounting member 6 and the glass plate 3 is attached to the lower end of the movable member 8.

Each of the contact pins 5 comprises an end portion 10 for coupling to the PCB 4 and which rest on the mounting member 6. At the opposite end of the end portion 10 from the PCB 4, a central portion 11 depends from the end portion 10 at approximately right angles to the end portion 10. A bent section 12 depends from the central portion 11 and terminates in a contact end 13. The central portion 11, bent section 12 and contact end portion 13 are shown in more detail in Figure 2. In Figure 2 it can be seen that the bent section 12 includes a first spring portion 14 and a second spring portion 15. The spring portion 14 depends from the central section 11 and the second spring portion 15 depends from the first spring portion 14. The contact end portion 13 depends from the lower end of the second spring portion 15. As shown

in Figure 2, the length of the second spring portion 15 is longer than length of the first spring portion 14. This generates an offset between the central axis of the end portion 13 and central axis of the central portion 11, which are generally parallel. The offset is typically approximately 1.5 times the diameter of the central portion 11. The angle between the first spring portion 14 and the second spring portion 15 is typically in the region of 45° to 135° and is preferably between 60° and 135° .

The contact pins 5 are typically manufactured from a metal wire such as tungsten, beryllium copper, palladium, paliney alloy or any other suitable metal material. The contact pins 5 can also be comprised of a suitable base metal with another metal coated on this base metal. The wire diameter is typically in the region of 1 mil to 10 mil and the surface of the contact end 13 may have a diameter of approximately 1 mil to 2.5 mil with a flat or curved surface. In addition, the second spring portion 15 and the contact end 13 are etched to form a taper towards the contact end 13, as shown in Figure 2.

The glass plate 3 is typically a borosilicate glass and has micro holes 16 therein which may be formed by laser drilling, and the contact end 13 protrudes through the micro holes 16.

The movable member 8 is coupled to a driving device (not shown) which vibrates the movable member 8 relative to the

body member 7. Suitable driving devices may be piezo-electric devices, micro motors or ultrasonic devices. Typically, the movement of the movable member 8 generated by the driving device is of the order 10 microns to 100 microns. As both the contact pins 5 and the glass plate 3 are attached to the movable member 8, both the contact pins 5 and the glass plate 3 move with the movement of the movable member 8.

A typical flexure ring 1 arrangement is shown in Figures 3 and 4. The body member 7 extends around the periphery of the flexure ring 1 and the movable member 8 is located within the body member 7 and is connected to the body member 7 only by four elastic beams 9. An aperture 17 is defined by the movable member 8 and the aperture 17 is filled with the glass plate 3. The flexure ring 1 is formed from a single piece of material, such as steel, aluminium or titanium and the elastic beam 9 and the movable member 8 are formed by cutting slots 18, 19, 20, 21 in the material. The configuration of the slots 18 - 21 which define the body member 7, the movable member 8 and the elastic beams 9 are such that the movable member 8 is able to move relative to the body member 7 only in one dimension as indicated by the arrows 22 in Figures 1 and 3. In particular, the movable member 8 is prevented from moving at right angles to the arrows 22 by the configuration of the slots 18 - 21 and the thickness of the material used for the flexure ring 1. As shown in Figures 3 and 4, the flexure ring 1 also includes two mounting plates 23 located at opposite ends of the flexure ring 1 which permit the

flexure ring 1 and in particular, the body member 7 to be attached to the PCB 4 and permits the interface device to be mounted on a suitable support on the testing equipment.

Figures 5 to 7 show a bending jig 30 for forming the contact pins 5. The bending jig 30 includes five parallel slots 31 each of which accommodates a piece of wire from which a contact pin 5 is to be formed. The wires are each placed in one of the slots 31 such that the end of the wire extends across a transverse "V" shaped recess 32 in the jig 30. The "V" shaped recess 32 (see Figure 7) includes a left hand surface 33 and a right hand surface 34. The left hand surface 33 is shorter than the right hand surface 34 and the right hand surface 34 exits at a higher level than the exit of the surface 33 from the "V" shaped recess 32.

A former 35 for use with the jig 30 is shown in Figures 8 and 9. The former 35 has a "V" shaped portion 36 which conforms to the "V" shaped recess 32 and a planar section 37 which lies over surface 38 of former 30 when the "V" shaped portion 36 is inserted into the "V" shaped recess 32. When the jig 35 is abutted against the former 30 such that the "V" shaped portion 36 engages with the "V" shaped recess 32, the "V" shaped portion 36 recess 32 forms the spring shape portion 13 in the contact pin 5.

In use, the interface device 2 is electrically coupled to testing equipment via contacts on the PCB 4 and the glass

plate 3 is placed over a silicon wafer (not shown) which contains a number of dies to be tested. The contact pins 5 are arranged on the dies in a specific pattern such that when the glass plate 3 is placed over a semiconductor wafer, the contact ends 13 contact the bond pads of the dies on the silicon wafer. Actuation of the driving device causes relative movement of the pins 5 against the bond pads of the dies to generate a scrubbing action to brush off any oxide present on the surface of the bond pads to ensure good electrical contact between the bond pads and the probe during testing.

An advantage of the invention is that the central axis of the contact end 13 is parallel to the central portion 11 and the use of the spring section 12 helps maintain a constant contact force on the bond pads when the movable member 8 is driven to cause the contact pins 5 to scrub the bottom pad. In addition, the orientation of the contact pins 5 permits a higher force be more easily exerted on the bond pads, as desired.

CLAIMS

1. An interface device for providing an interface between testing equipment and an integrated circuit to be tested, the interface device comprising a body member, a movable member mounted on the body member for movement with respect to the body member and a number of elongate contact members mounted on the movable member, for movement with the movable member; each elongate contact member comprising a contact end, adapted to contact a bond pad of an integrated circuit to be tested, and a body portion, the central axis of the body portion and the contact end being substantially parallel to each other.
2. An interface device according to claim 1, wherein each contact member comprises a spring shaped portion located between the contact end and the body portion.
3. An interface device according to claim 2, wherein the spring shaped portion comprises a first portion and a second portion, the portions being at an angle to each other and to the body portion and the contact end.
4. An interface device according claim 3, wherein the angle between the first and the second portions is approximately 45° to 135°.

5. An interface device according to claim 4, wherein the angle between the first and the second portions is approximately 60° to 135° .
6. An interface device according to any of claims 3 to 5, wherein the first portion is longer than the second portion so that the central axis of the contact end is not coincident with the central axis of the body portion.
7. An interface device according to claim 6, wherein the central axis of the contact end and the central axis of the body portion are separated by a distance approximately equal to 1.5 times the diameter of the body portion.
8. An interface device according to claim 6 or claim 7, wherein the first portion is coupled to the contact end and the second portion is coupled to the body portion.
9. An interface device according to any of claims 2 to 8, wherein the contact end and the spring portion are tapered towards the end of the contact end.
10. An interface device according to any of the preceding claims, and further comprising a printed circuit board to which the end of the contact member opposite to the contact end is coupled, and the printed circuit board being adapted to permit testing equipment to be coupled to the printed circuit board.

11. An interface device according to any of the preceding claims, wherein the movable member is coupled to the body member by an elastically flexible member.
12. An interface device according to claim 11, wherein the body member, the elastically flexible member and the movable member are formed from a single piece of material.
13. An interface device according to claim 12, wherein portions of the single piece of material are removed to form the elastically flexible member.
14. An interface device according to any of claims 11 to 13, wherein the body member, the elastically flexible member and the movable member are fabricated from a metal material.
15. An interface device according to any of claims 11 to 14, wherein the elastically flexible member is in the form of an elastic beam which is generally U-Shaped.
16. An interface device according to any of claims 11 to 15, wherein the movable member is coupled to the body member by a number of elastically flexible members.
17. An interface device according to any of the preceding claims, wherein the body member encircles the movable member.
18. An interface device according to any of the preceding

claims, wherein the movable member defines an aperture into which the contact members protrude.

19. An interface device according to any of the preceding claims, and further comprising an excitation device to move the movable member with respect to the body member.

1/4


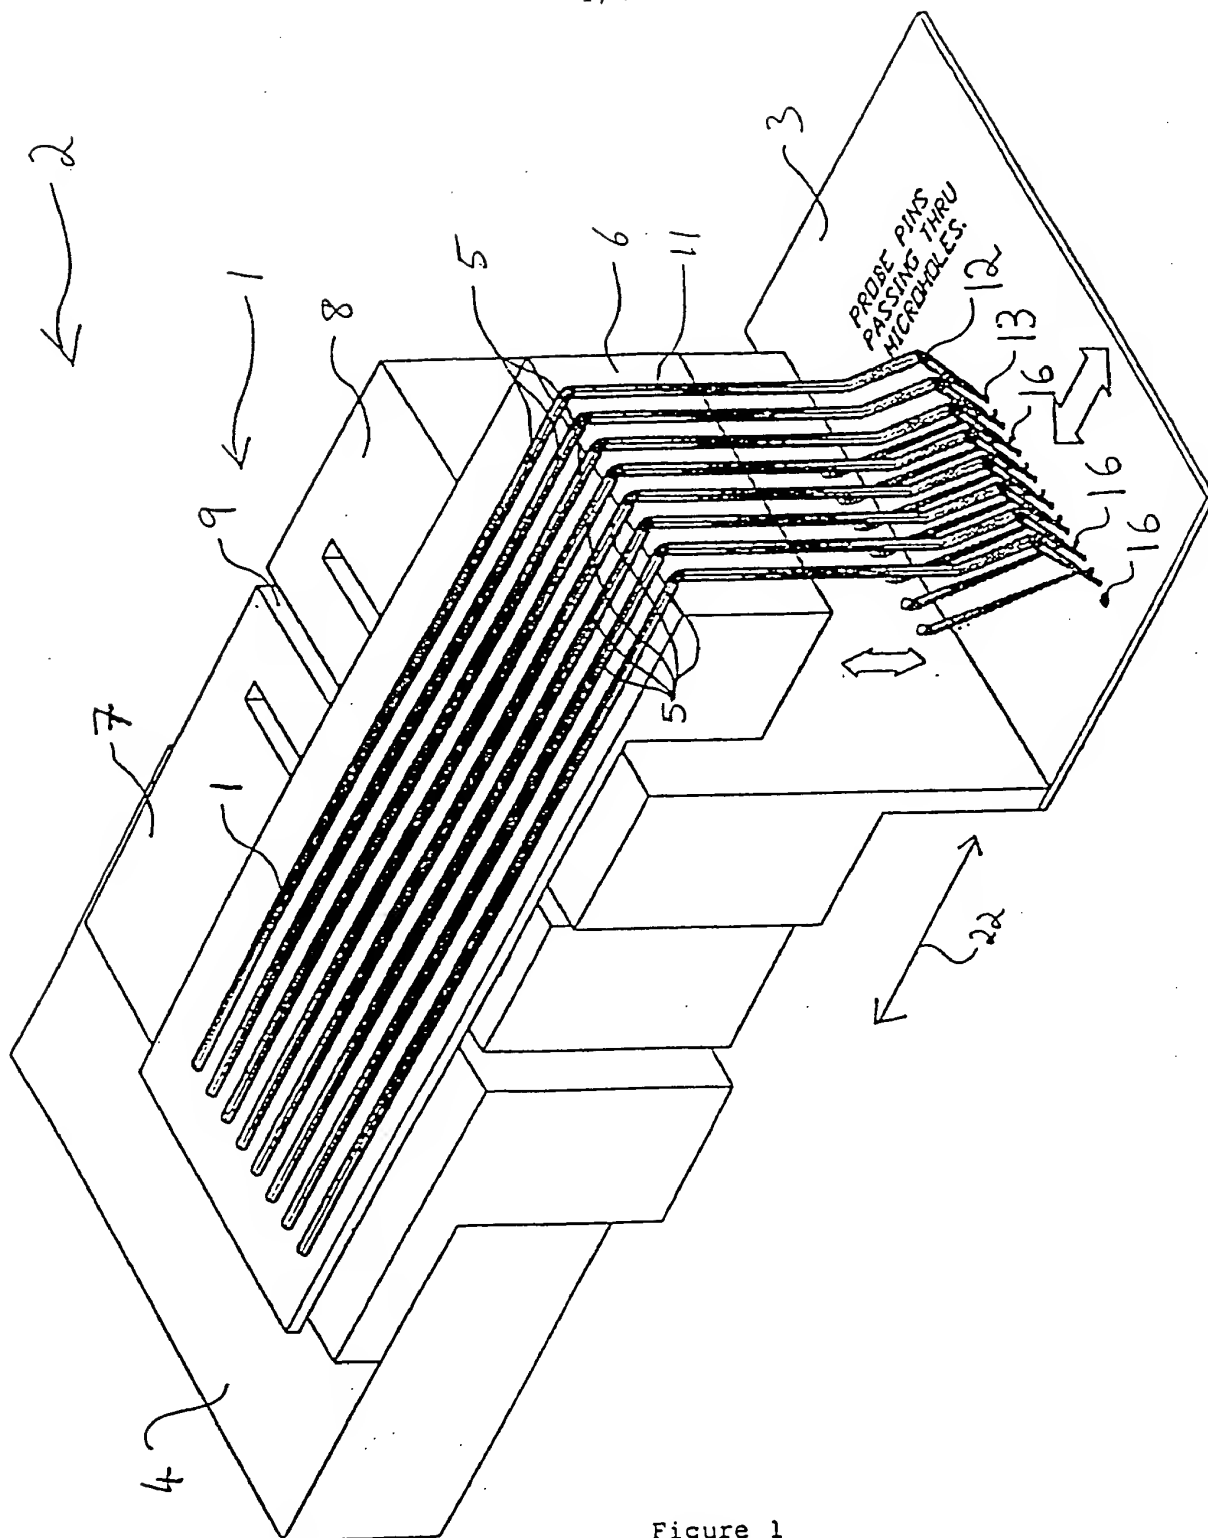


Figure 1

2/4

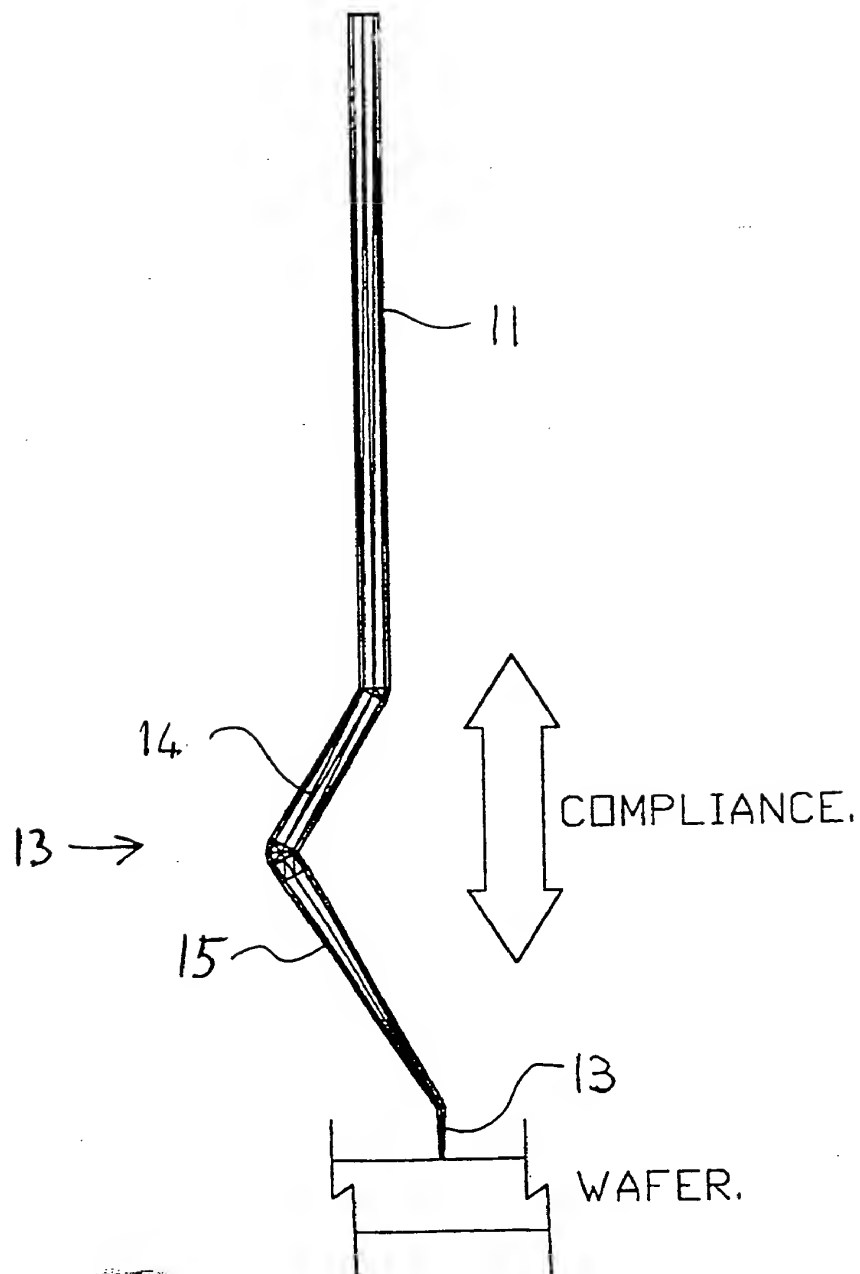

NEW PIN GEOMETRY.

Figure 2

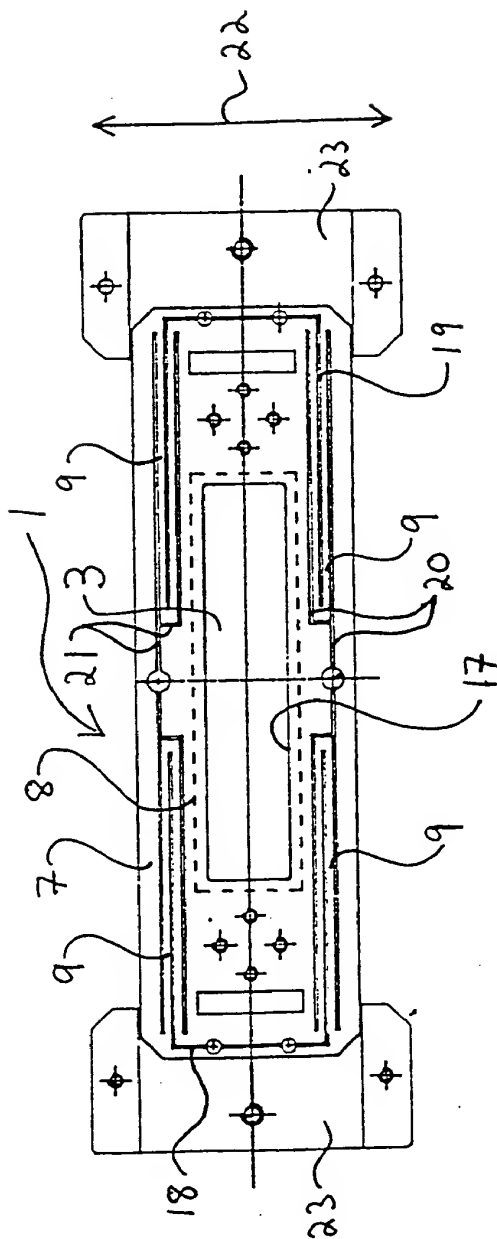


Figure 3

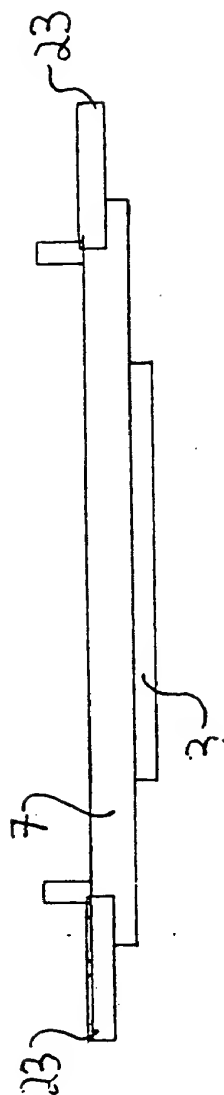


Figure 4

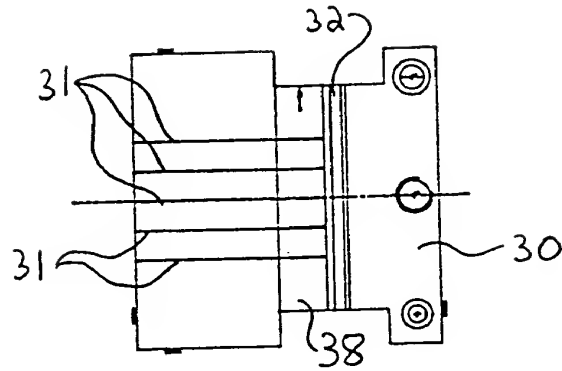


Figure 5

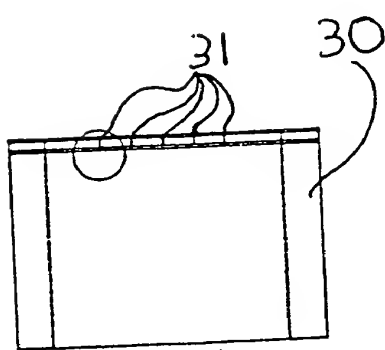


Figure 6




Figure 7

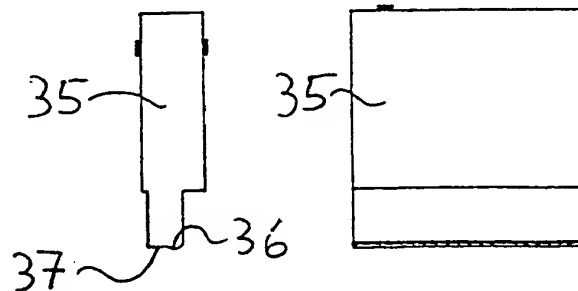


Figure 8

Figure 9

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SG 98/00068

A. CLASSIFICATION OF SUBJECT MATTER

IPC⁶: G 01 R 31/28, 1/04; H 01 L 21/66

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC⁶: G 01 R 31/28, 1/04; H 01 L 21/66

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 305 951 A1 (EVERETT) 08 March 1989 (08.03.89), abstract; fig. 34-36; column 28, line 49 - column 32, line 35.	1-5, 10-12, 13, 15
A	WO 96/37 931 A1 (FORMFACTOR) 28 November 1996 (28.11.96), abstract; page 3, lines 1-19; fig. 7. ----	1

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents:

„A“ document defining the general state of the art which is not considered to be of particular relevance

„E“ earlier application or patent but published on or after the international filing date

„L“ document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

„O“ document referring to an oral disclosure, use, exhibition or other means

„P“ document published prior to the international filing date but later than the priority date claimed

„T“ later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

„X“ document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

„Y“ document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

„&“ document member of the same patent family

Date of the actual completion of the international search

15 March 1999 (15.03.99)

Date of mailing of the international search report

04 June 1999 (04.06.99)

Name and mailing address of the ISA/AT

Austrian Patent Office

Kohlmarkt 8-10; A-1014 Vienna

Facsimile No. 1/53424/535

Authorized officer

Kutzelnigg

Telephone No. 1/53424/456

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.
PCT/SG 98/00068

la Recherchebericht angeführtes Patentedokument Patent document cited in search report Document de brevet cité dans le rapport de recherche		Datum der Veröffentlichung Publication date Date de publication		Mitglied(er) der Patentfamilie Patent family member(s) Membre(s) de la famille de brevets		Datum der Veröffentlichung Publication date Date de publication	
EP A1	305951	08-03-89		AT E	101278	15-02-94	
				DE D0	3887599	17-03-94	
				DE T2	3887599	11-05-94	
				EP B1	305951	02-02-94	
				JP B2	2598482	09-04-97	
				US A	5049813	17-09-91	
				US A	5247246	21-09-92	
				US A	5289117	22-02-94	
				US A	5444387	22-02-94	
				JP A2	2006764	10-01-90	
				US A	5180976	19-01-92	
WO A1	9637931	28-11-96		AU A1	59641796	11-12-96	
				AU A1	423376/96	06-06-96	
				AU A1	593977/96	11-12-96	
				AU A1	596407/96	11-12-96	
				AU A1	602877/96	11-12-96	
				AU A1	637777/96	11-12-96	
				AU A1	663527/96	18-12-96	
				AU A1	596577/96	22-05-97	
				CN A	1191500	26-08-98	
				EP A1	792463	03-09-97	
				EP A1	828582	18-03-98	
				EP A1	837750	29-04-98	
				EP A4	837750	10-06-98	
				EP A4	792463	24-06-98	
				EP A1	859686	26-08-98	
				EP A4	859686	11-11-98	
				EP A2	886894	30-12-98	
				EP A4	828582	03-02-99	
				JP T2	9512139	02-12-97	
				JP T2	10506238	16-06-98	
				JP T2	10510107	29-09-98	
				US A	5829128	03-11-98	
				WO A1	9615459	23-05-96	
				WO A1	9637331	28-11-96	
				WO A1	9637332	28-11-96	
				WO A1	9637333	28-11-96	
				WO A1	9637334	28-11-96	
				WO A2	9638858	05-12-96	
				WO A3	9638858	20-03-97	
				WO A2	9716866	09-05-97	
				WO A3	9716866	19-06-97	
				US A	5806181	15-09-98	
				US A	5832601	10-11-98	
				US A	5864946	02-02-99	
				WO A1	9617378	06-06-96	
				EP A1	42839796	19-06-96	
				EP A1	792517	03-09-97	
				EP A4	792517	24-06-98	
				AU A1	41598796	06-06-96	
				AU A1	41600796	06-06-96	
				AU A1	41599796	17-06-96	
				CN A	1171167	21-01-98	
				EP A1	792462	03-09-97	
				EP A1	792519	03-09-97	
				EP A1	795200	17-09-97	
				EP A4	795200	12-11-97	
				EP A4	792462	29-12-97	
				EP A4	792519	24-06-98	
				JP T2	9508241	19-08-97	
				JP T2	10506197	16-06-98	
				WO A1	9615458	23-05-96	
				WO A1	9615551	23-05-96	
				WO A1	9616440	30-05-96	
				US A	5772451	30-06-98	
				US A	5820014	13-10-98	
				US A	5601740	11-02-97	
				US A	5773780	30-06-98	
				WO A1	9514314	26-05-95	
				EP A1	729652	04-09-96	
				EP A4	729652	24-06-98	
				JP T2	9505439	27-05-97	
				CN A	1135268	06-11-96	
				AU A1	307377/97	05-12-97	
				AU A1	307397/97	05-12-97	
				AU A1	313667/97	05-12-97	
				CN A	1197514	28-10-98	
				EP A2	898712	03-03-99	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/SG 98/00068

WO	A1	9743653	20-11-97
WO	A1	9743654	20-11-97
WO	A2	9743656	20-11-97
WO	A1	9744676	27-11-97
AU	A1	31277/97	09-12-97
EP	A1	839321	06-05-98
EP	A1	839322	06-05-98
EP	A1	839323	06-05-98
US	A	5476211	19-12-98
US	A	5852871	29-12-98
AU	A1	36034/97	02-02-98
WO	A1	9801906	15-01-98
AU	A1	72942/98	27-11-98
WO	A1	9850953	12-11-98
AU	A1	74915/98	08-12-98
WO	A1	9852224	19-11-98

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.